


MOLDED

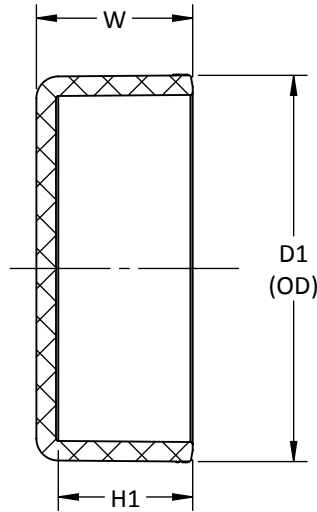

ASTM D2665, F1866, F2135, CSA B181.2 WHERE APPLICABLE

**CAP (H)  
PVC SOLVENT WELD DWV**

PART NO.	SIZE IN INCHES	H1	W	D1
* D1604	4	1 25/32	2 1/32	5 1/32
* D1606	6	3 1/16	3 11/32	7 7/32
* D1608	8	4 1/16	4 13/32	9 11/32
* D16010	10	5 1/16	5 3/4	11 17/32
* D16012	12	6 1/16	6 21/32	13 19/32

-- DIMENSIONS AND APPEARANCE ARE APPROXIMATE AND SUBJECT TO CHANGE  
WITHOUT NOTICE DUE TO DESIGN OR PRODUCTION MODIFICATIONS  
-- MOLDED FITTING TOLERANCE = ±1/8" OVERALL LENGTH  
-- FABRICATED FITTING TOLERANCE = ±1" LINEAR, ± 2° ANGULAR

\* MOLDED FITTING  
† ASSEMBLED FROM MOLDED COMPONENTS  
ALL OTHER FITTINGS ARE FABRICATED